



A38 CONCERT HALL LIGHTS RIDER - 2022

WEBSITE <https://www.a38.hu/en>

We ask you not to put any gear on stage until the house technicians arrive!

A38 TECHNICAL INFORMATION

TECHNICAL CONTACTS:

Barnabás [barnabas at a38.hu](mailto:barnabas@a38.hu)
Tamás Vörös voros.tamas-at-a38.hu

PROHIBITED Use of pyrotechnics, confetti, silly strings of any kind.

STAGE 11,6 x 5,8 x 0,9 m (38' x 19' x 2,9')
clearance: 2,5m (8,2')

CONCERT HALL including stage: 11,6 x 25,8 x 4m (38' x 84,6' x 13,12')

POWER SUPPLY Besides our usual power supply sound&light of house:
3x32A on stage (lights)

BACK DROP Black curtain along the whole width of the stage. If Artist brings their own backdrop, a fire safety certificate must be sent in advance a week prior to show to the production department, otherwise, the backdrop cannot be used.


If Artist will use the light controller of A38, but also brings additional lamps, the representative of the Artist must send the exact list of the lamps with the patch list as well in advance two weeks prior to show date.



A38 CONCERT HALL FLOORPLAN

A38
90

A-A - FRONT SECTION

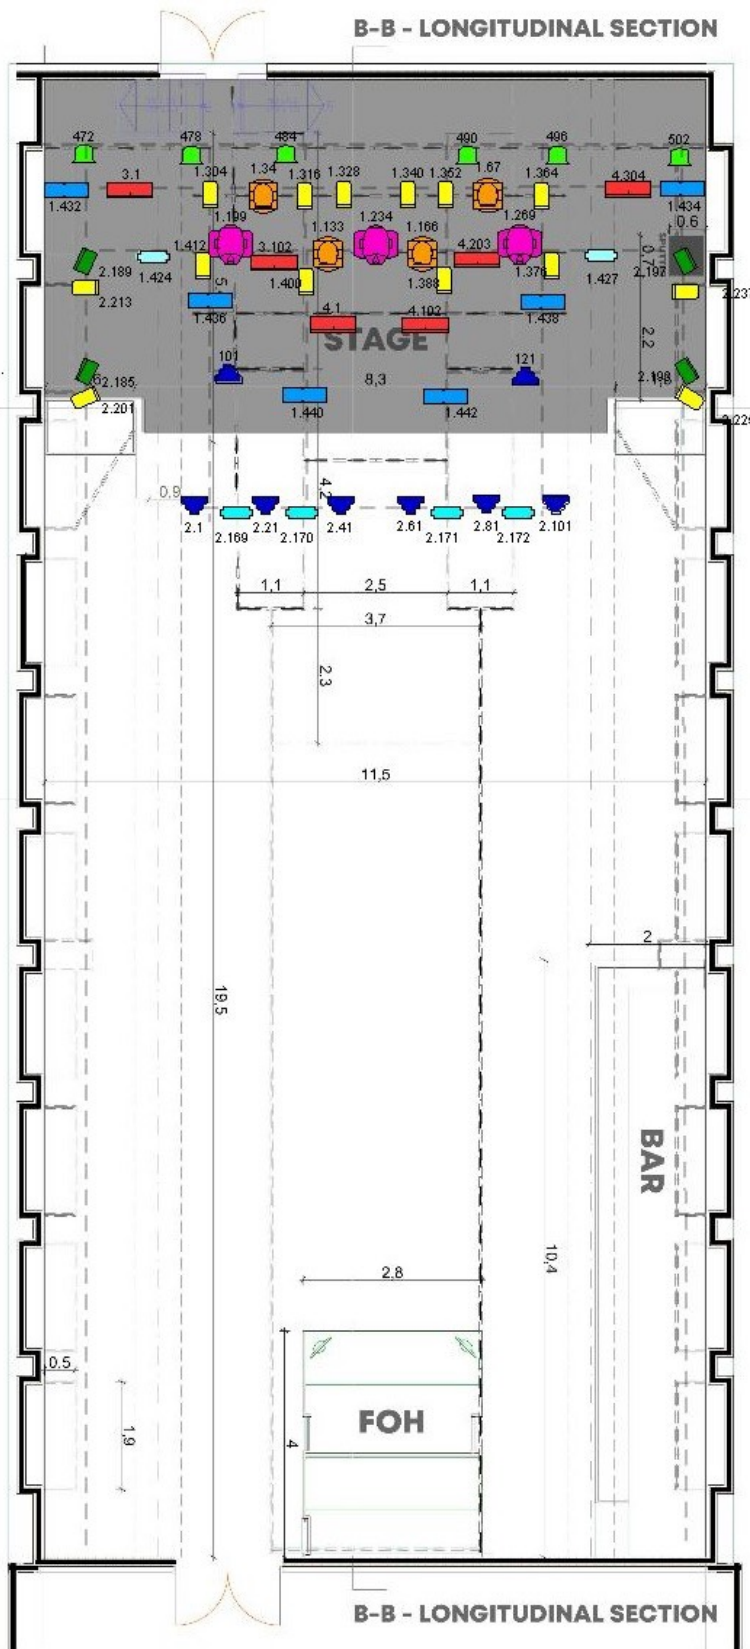

A-A - FRONT SECTION

B-B - LONGITUDINAL SECTION

A38 PATCH LIST:

Light Desk: Avolites Pearl Expert Pro Update + Touch Wing (Titan version: 14.0)			
Node: NA Company			
Art-NET protocol:	IP: 2.0.0.1.		
	Subnet mask: 255.255.255.0.		
	Default gateway: 192.168.0.1.		
	Patch	Type	Channels
	1.34	DTS Max	33 channels
	1.67	DTS Max	33 channels
	1.100	DTS Max	33 channels
	1.133	DTS Max	33 channels
	1.199	A.leda B-Eye K10	35 channels (Shapes mode)
	1.234	A.leda B-Eye K10	35 channels (Shapes mode)
	1.269	A.leda B-Eye K10	35 channels (Shapes mode)
	1.304	Showtec Spectral M1500 Q4	12 channels (Tour mode)
	1.316	Showtec Spectral M1500 Q4	12 channels (Tour mode)
	1.328	Showtec Spectral M1500 Q4	12 channels (Tour mode)
	1.340	Showtec Spectral M1500 Q4	12 channels (Tour mode)
	1.352	Showtec Spectral M1500 Q4	12 channels (Tour mode)
	1.364	Showtec Spectral M1500 Q4	12 channels (Tour mode)
	1.376	Showtec Spectral M1500 Q4	12 channels (Tour mode)
	1.388	Showtec Spectral M1500 Q4	12 channels (Tour mode)
	1.400	Showtec Spectral M1500 Q4	12 channels (Tour mode)
	1.412	Showtec Spectral M1500 Q4	12 channels (Tour mode)
	1.424	2 Mole Blinder	
	1.425	2 Mole Blinder	
	1.426	2 Mole Blinder	
	1.427	2 Mole Blinder	
	1.432	Hungaroflash EUDMX Pro	2 channels
	1.434	Hungaroflash EUDMX Pro	2 channels
	1.436	Hungaroflash EUDMX Pro	2 channels
	1.438	Hungaroflash EUDMX Pro	2 channels
	1.440	Hungaroflash EUDMX Pro	2 channels
	1.442	Hungaroflash EUDMX Pro	2 channels

	1.472	Showtec Cameleon Spot 18-3	6 channels	
	1.478	Showtec Cameleon Spot 18-3	6 channels	
	1.484	Showtec Cameleon Spot 18-3	6 channels	
	1.490	Showtec Cameleon Spot 18-3	6 channels	
	1.496	Showtec Cameleon Spot 18-3	6 channels	
	1.502	Showtec Cameleon Spot 18-3	6 channels	
	2.1	DTS Nick NRG 801	20 channels	
	2.21	DTS Nick NRG 801	20 channels	
	2.41	DTS Nick NRG 801	20 channels	
	2.61	DTS Nick NRG 801	20 channels	
	2.81	DTS Nick NRG 801	20 channels	
	2.101	DTS Nick NRG 801	20 channels	
	2.121	DTS Nick NRG 801	20 channels	
	2.141	DTS Nick NRG 801	20 channels	
	2.169	2 Mole Blinder		
	2.170	2 Mole Blinder		
	2.171	2 Mole Blinder		
	2.172	2 Mole Blinder		
	2.185	China RGB 4 Ch	4 channels	
	2.189	China RGB 4 Ch	4 channels	
	2.193	China RGB 4 Ch	4 channels	
	2.201	Showtec Spectral M1500 Q4	12 channels (Tour mode)	
	2.213	Showtec Spectral M1500 Q4	12 channels (Tour mode)	
	2.225	Showtec Spectral M1500 Q4	12 channels (Tour mode)	
	2.237	Showtec Spectral M1500 Q4	12 channels (Tour mode)	
	2.403	Unique 2.1 Hazer		
	2.405	Unique 2.1 Hazer		
	Patch	Type	Channels	Fixture/Head file
	3.1	Showtec Pixelbar 16Q6	101 channels	Showpro Hex16 Strip
	3.102	Showtec Pixelbar 16Q6	101 channels	Showpro Hex16 Strip
	4.1	Showtec Pixelbar 16Q6	101 channels	Showpro Hex16 Strip
	4.102	Showtec Pixelbar 16Q6	101 channels	Showpro Hex16 Strip
	4.203	Showtec Pixelbar 16Q6	101 channels	Showpro Hex16 Strip
	4.304	Showtec Pixelbar 16Q6	101 channels	Showpro Hex16 Strip