



## A38 HAJÓ FÉNYTECHNIKA RIDER - 2021

HONLAP <http://www.a38.hu>

**Hajó technikusainak megérkezése előtt a színpadra nem lehet pakolni!**

[A38 KONCERTTEREM ALAPRAJZ](#)

### TECHNIKAI KONTAKTOK:

Barnabás [barnabas at a38.hu](mailto:barnabas@www.a38.hu)  
Vörös Tamás [voros.tamas-at-a38.hu](mailto:voros.tamas-at-a38.hu)

TILOS HASZNÁLNI: Pirotechnikát, nyílt lángot, konfettit és minden egyéb ehhez hasonló eszközt.

SZÍNPAD MÉRETEI 11,6 x 5,8 x 0,9 Belmagasság a színpadon mérve: 2,5 m.

### KONCERTTEREM MÉRETEI

Színpaddal együtt: 11,6 x 25,8 m.

ÁRAMELLÁTÁS A beépített hang-és fénytechnika ellátásán kívül a színpadon 3x32 A


### SZÍNPADI FÜGGÖNY

Fekete függöny a színpad hátterében, teljes szélességben.

Ha a produkció a saját háttérfüggönyét vagy díszletét használja, a **tűzvédelmi igazolást** minimum egy héttel a rendezvény előtt a programszervezőnek köteles elküldeni. Ennek hiányában a függöny nem tehető fel!

A38 - Fixture List			
Symbol	Name	Count	Notes
	Nick NRG 801	8	20 Ch
	DTS - Max	6	33 Ch
	Spectral M1500 Q4	14	12 Ch
	Leader Light 06-D (WWWWWWWS)	10	8 Ch
	2 Mole Blinder	12	1 Ch
	Hungaoflash EUDMX Pro	6	2 Ch
	Aleda K10 B-EYE	3	35 Ch
	Showtec Cameleon Spot	6	6 Ch
	China RGB 4 Ch	4	4 Ch
	Unique 2.1 Hazer	2	2 Ch

Light Desk : Avolites Pearl Expert Pro Update + Touch Wing (Trian version is v.14.0)  
 We use NA Company Art-Net node with CAT5e cable.  
 Art-NET protocol  
 Node: IP : 2.0.0.1.  
 Subnet mask: 255.255.255.0.  
 Default gateway: 192.168.0.1.

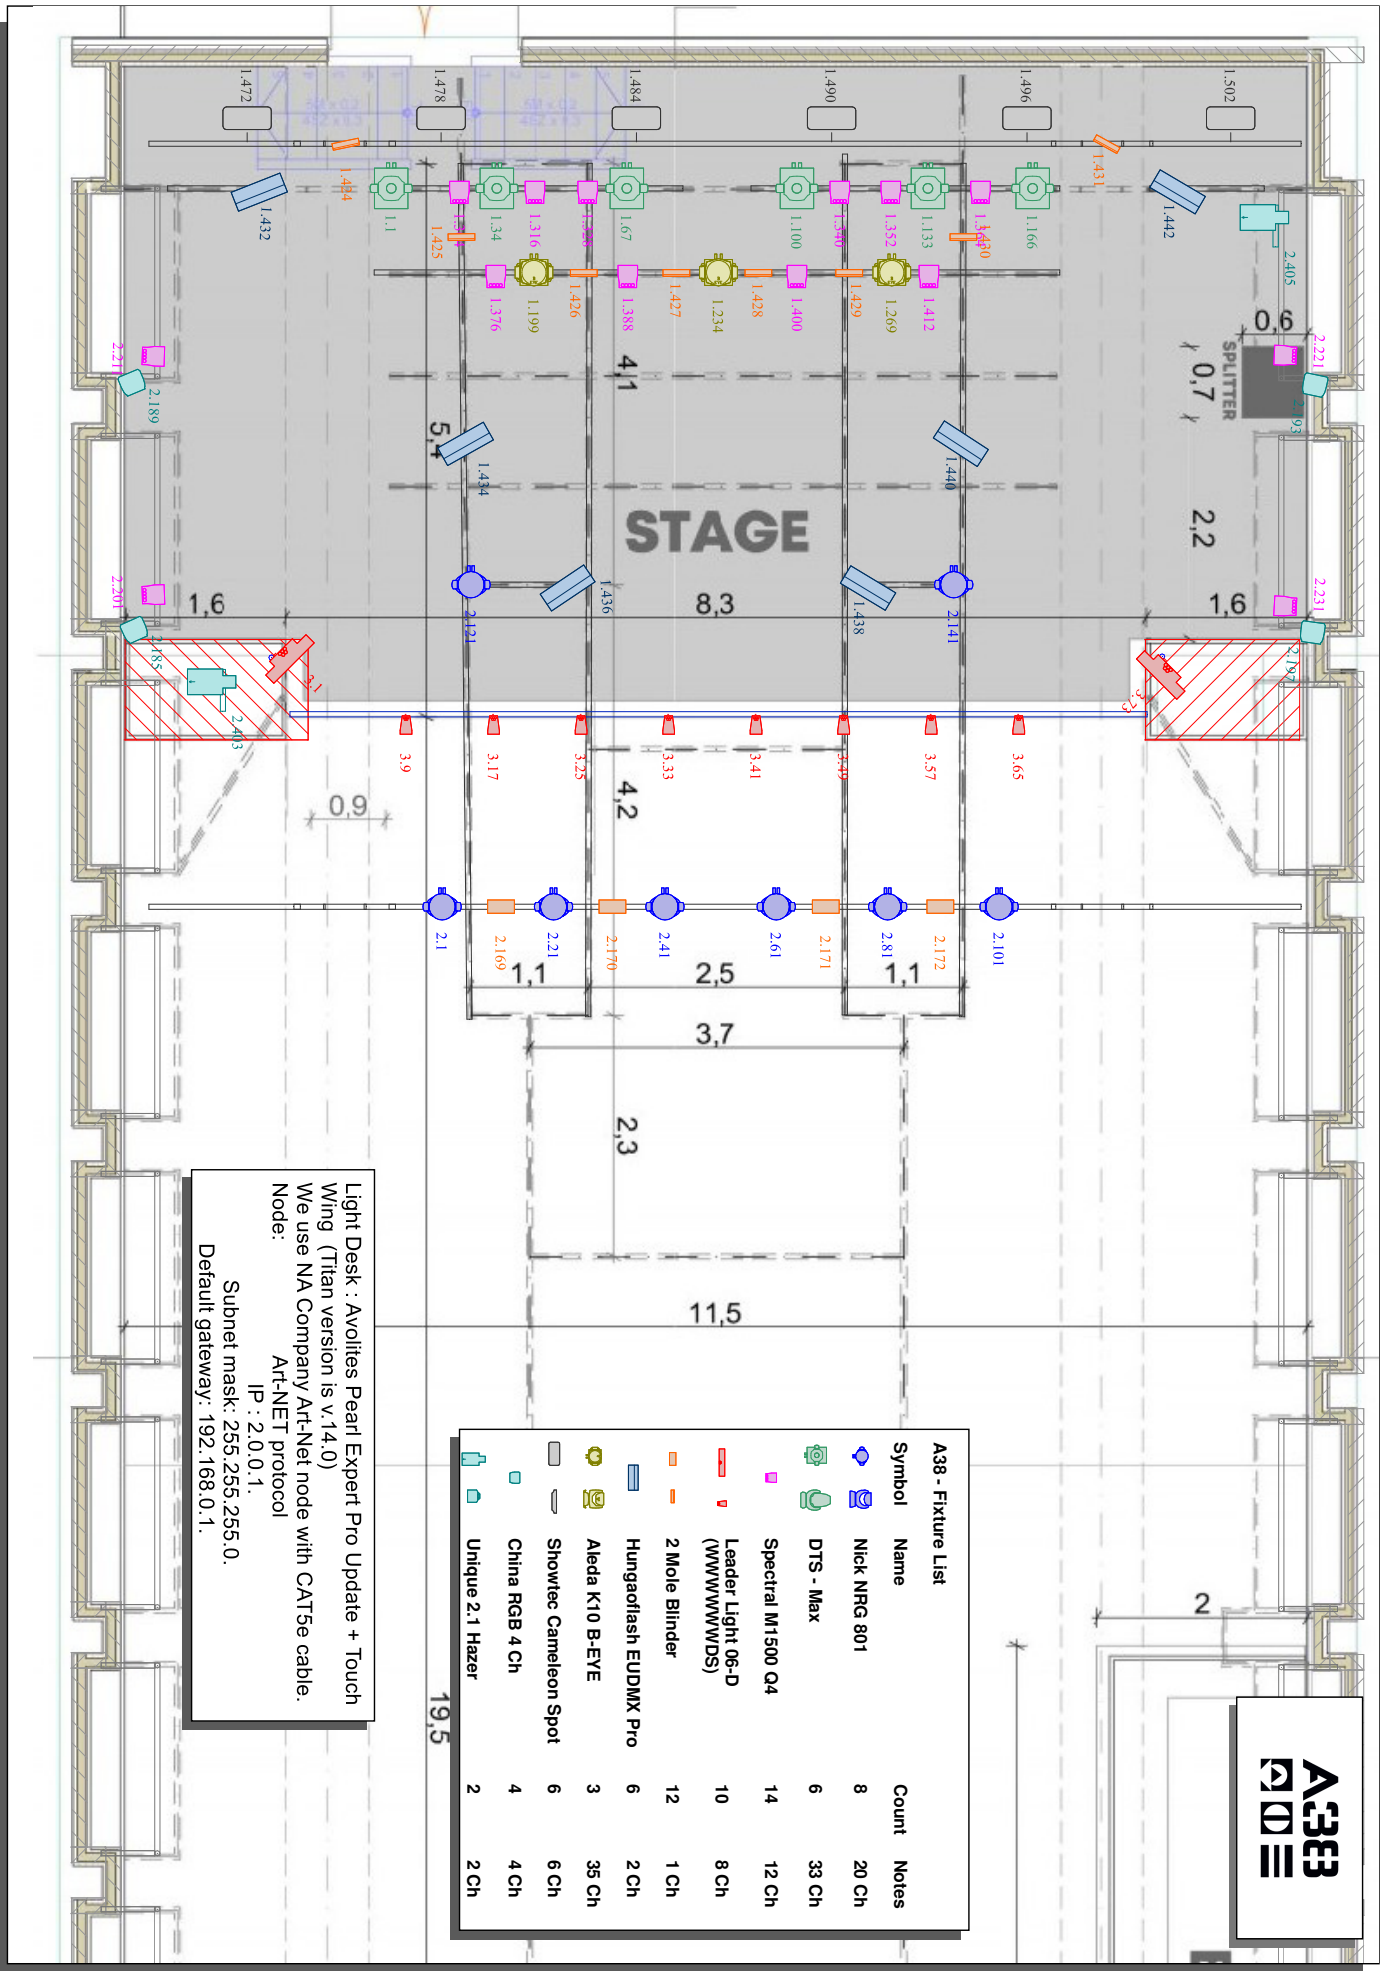

A38 PATCH LIST:

Patch	Type	Channels
1.1	DTS Max	33 channels
1.34	DTS Max	33 channels
1.67	DTS Max	33 channels
1.100	DTS Max	33 channels
1.133	DTS Max	33 channels
1.166	DTS Max	33 channels
1.199	A.leda B-Eye K10	35 channels (Shapes mode)
1.234	A.leda B-Eye K11	35 channels (Shapes mode)
1.269	A.leda B-Eye K12	35 channels (Shapes mode)
1.304	Showtec Spectral M1500 Q4	12 channels (Tour mode)
1.316	Showtec Spectral M1500 Q4	12 channels (Tour mode)
1.328	Showtec Spectral M1500 Q4	12 channels (Tour mode)
1.340	Showtec Spectral M1500 Q4	12 channels (Tour mode)
1.352	Showtec Spectral M1500 Q4	12 channels (Tour mode)
1.364	Showtec Spectral M1500 Q4	12 channels (Tour mode)
1.376	Showtec Spectral M1500 Q4	12 channels (Tour mode)
1.388	Showtec Spectral M1500 Q4	12 channels (Tour mode)
1.400	Showtec Spectral M1500 Q4	12 channels (Tour mode)
1.412	Showtec Spectral M1500 Q4	12 channels (Tour mode)
1.424	2 Mole Blinder	
1.425	2 Mole Blinder	
1.426	2 Mole Blinder	
1.427	2 Mole Blinder	
1.428	2 Mole Blinder	
1.429	2 Mole Blinder	
1.430	2 Mole Blinder	
1.431	2 Mole Blinder	
1.432	Hungaroflash EUDMX Pro	2 channels
1.434	Hungaroflash EUDMX Pro	2 channels
1.436	Hungaroflash EUDMX Pro	2 channels
1.438	Hungaroflash EUDMX Pro	2 channels
1.440	Hungaroflash EUDMX Pro	2 channels
1.442	Hungaroflash EUDMX Pro	2 channels
1.472	Showtec Cameleon Spot 18-3	6 channels
1.478	Showtec Cameleon Spot 18-3	6 channels
1.484	Showtec Cameleon Spot 18-3	6 channels
1.490	Showtec Cameleon Spot 18-3	6 channels
1.496	Showtec Cameleon Spot 18-3	6 channels
1.502	Showtec Cameleon Spot 18-3	6 channels

2.1	DTS Nick NRG 801	20 channels
2.21	DTS Nick NRG 801	20 channels
2.41	DTS Nick NRG 801	20 channels
2.61	DTS Nick NRG 801	20 channels
2.81	DTS Nick NRG 801	20 channels
2.101	DTS Nick NRG 801	20 channels
2.121	DTS Nick NRG 801	20 channels
2.141	DTS Nick NRG 801	20 channels
2.169	2 Mole Blinder	
2.170	2 Mole Blinder	
2.171	2 Mole Blinder	
2.172	2 Mole Blinder	
2.185	China RGB 4 Ch	4 channels
2.189	China RGB 4 Ch	4 channels
2.193	China RGB 4 Ch	4 channels
2.197	China RGB 4 Ch	4 channels
2.201	Showtec Spectral M1500 Q4	12 channels (Tour mode)
2.213	Showtec Spectral M1500 Q4	12 channels (Tour mode)
2.225	Showtec Spectral M1500 Q4	12 channels (Tour mode)
2.237	Showtec Spectral M1500 Q4	12 channels (Tour mode)
2.403	Unique 2.1 Hazer	
2.405	Unique 2.1 Hazer	
3.1	Leader Light 06-D	8 channels
3.9	Leader Light 06-D	8 channels
3.17	Leader Light 06-D	8 channels
3.25	Leader Light 06-D	8 channels
3.33	Leader Light 06-D	8 channels
3.41	Leader Light 06-D	8 channels
3.49	Leader Light 06-D	8 channels
3.57	Leader Light 06-D	8 channels
3.65	Leader Light 06-D	8 channels
3.73	Leader Light 06-D	8 channels