



A38 SHIP SMALL HALL 2023

LOCATION	A38 Ship - Budapest
ADDRESS	Henryk Slawik lower quay (Petőfi Bridge Buda side) H-1117 Budapest https://goo.gl/maps/D6ucj6RkCjxkJ3mbA
FAX	0036 1 464 39 45
WEBSITE	http://www.a38.hu
E-MAIL	info at a38.hu
PROHIBITED	Use of pyrotechnics, confetti, silly strings of any kind.
SMOKING	Please note that according to law no. XLII/1999. in Hungary it is only allowed to smoke in clubs, pubs, restaurants and venues in the assigned areas and nowhere else.
TIME SCHEDULE	Time schedule will be sent by our production department. Please read and confirm. Due to legal aspects concerning the A38 staff working hours the agreed time schedule is not to be exceeded. Changes in get-in times and number of local crew cannot be accepted after one week prior to show because of finalizing planning schedules in due time. Please also consider that the crew cannot enter the stage area until our technicians arrive and that all the load-in and load-out movements are going through our main bridge.



STAGE 5m x 3m x 0.6m (ceiling height on stage 2.5m)

SOUND NEXO system (2 x P12, 2 x LS18, NXAMP4x2MKII)
 Allen and Heath SQ5 + 2 x DX168 mixer
 4 x DAS Action M12a monitor wedges
 4 x Sennheiser EW-g4-G IEMs, microphones, stands, DIs, etc.

LIGHTS Lights controller: Chamsys PC mini wing+touch screen
 8 x ClayPaky mini B
 4 x ShowTec Pixelbar16Q6,
 4 x ShowTec Cameleon spot 18-3


PROJECTOR 1 x Hitachi CP-WX8265 projector (6500 ANSI Lumen) Please, contact us!

TECHNICAL CONTACTS
 Barnabás [barnabas at a38.hu](mailto:barnabas@a38.hu)
 Vörös Tamás [voros.tamas at a38.hu](mailto:voros.tamas@a38.hu)

PATCH LIST:

Light Desk: ChamSys MagicQ PC Wing		
Node: Chauvet Professional Net-X II		
Art-NET protocol:		IP: 2.0.0.1.
		Subnet mask: 255.0.0.0.
Patch	Type	Channels
1.1	Clay Paky Mini-B	21 channels (Extended RGBW)
1.22	Clay Paky Mini-B	21 channels (Extended RGBW)
1.43	Clay Paky Mini-B	21 channels (Extended RGBW)
1.64	Clay Paky Mini-B	21 channels (Extended RGBW)
1.85	Clay Paky Mini-B	21 channels (Extended RGBW)
1.106	Clay Paky Mini-B	21 channels (Extended RGBW)
1.127	Clay Paky Mini-B	21 channels (Extended RGBW)
1.148	Clay Paky Mini-B	21 channels (Extended RGBW)
2.1	Showtec Pixelbar 16Q6	101 channels
2.102	Showtec Pixelbar 16Q6	101 channels
2.203	Showtec Pixelbar 16Q6	101 channels
2.304	Showtec Pixelbar 16Q6	101 channels
2.405	Showtec Cameleon Spot 18-3	6 channels
2.411	Showtec Cameleon Spot 18-3	6 channels
2.417	Showtec Cameleon Spot 18-3	6 channels
2.423	Showtec Cameleon Spot 18-3	6 channels
3.511	Unique 2.1 Hazer	2 channels

FLOOR PLAN:

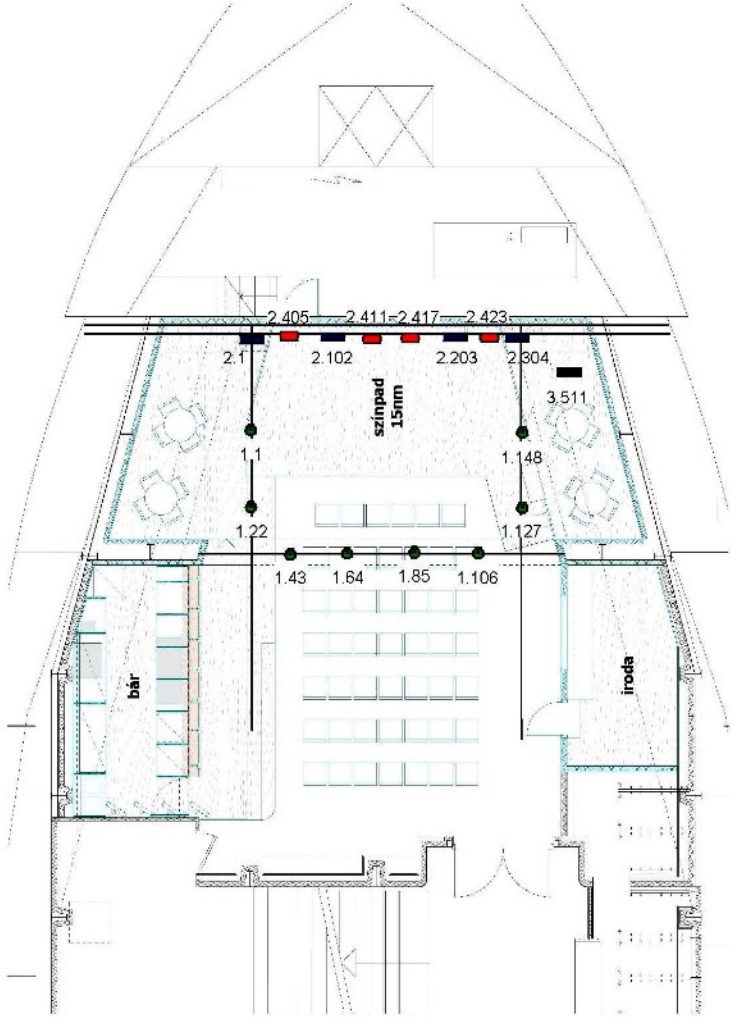

- 4pcs Showtec Pixelbar 1606 (66 channels)
- 4pcs Showtec Camelion Spot 18-7 (6 channels)
- 10pcs Clay Paky Mini-II (21 channels)
- 1pc Uniqua 2.1 Hazer (0 channels)